关键尺寸　控制尺寸　参考尺寸

REV.

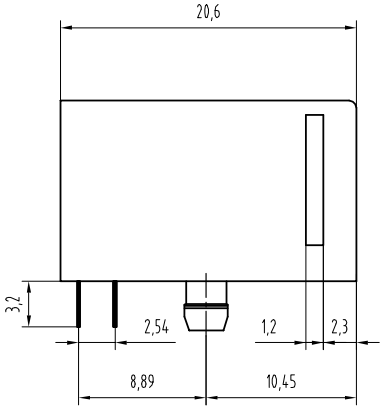







PC Board Layout

NOTES:

MATERIAL :

1.HOUSING MATERIAL	:GLASS FILLED POLYESTER UL94V-0.
2.CONTACT MATERIAL	:PHOSPHOR BRONZE φ0.46mm.
3.PLATING	:GOLD PLATING OVER NICKEL.

ELECTRICAL:

1.VOLTAGE RATING	:125 VAC RMS.
2.CURRENT RATING	:1.5 AMP.
3.CONTACT RESISTANCE	:30 MILLIOHMS MAX.
4.INSULATION RESISTANCE	:500 MEGOHMS MIN @ 500V DC .
5.DIELECTRIC WITHSTANDING RESISTANCE	:1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

1. DURRABILITY	:750 CYCLES MIN.
2.PCB RETENTION PRE-SOLDER	:1 LB MIN.

ENVIRONMENTAL:

1. STORAGE	: -40℃~+85℃
2. OPERATION	: 0°C TO 70°C.

PART NUMBER:

HS59C X X — X X X X X X X

59C SERIES SIDE ENTRY PCB JACK

POSITIONS	CONTACTS	PORTS	SHIELD	PANEL	PLASTIC	COLOR	LOGO	GOLD PLATING
4-4 POSITIONS 6-6 POSITIONS 8-8 POSITIONS	2-2 CONTACTS 4-4 CONTACTS 6-6 CONTACTS 8-8 CONTACTS	1-1 PORTS	0-W/O SHIELD 0-W/ SHIELD	1-W/O PANEL 2-W/ PANEL	1-PBT 2-NYLON66 3-NYLON46	1-BLACK 2-WHITE 3-GRAY 4-IVORY	0-W/O LOGO 1-W/ HYE 2-W/ UL 3-W/ HYE&UL	1-1.5u" 2-3u" 3-6u" 4-15u" 5-30u" 6-50u"

零件编号	
东莞市恒生传感器有限公司	公差要求 201 OVR ±0.20 51—200 ±0.15 50 UND ±0.10
零件名称 59C SERIES SIDE ENTRY PCB JACK	产品型号
图纸编号	材料
	孔径 ±0.05　角度 ±0.1°

序号	位置	更改内容	签字	日期	比例	设计	审核	批准
					单位 Millimetre	日期	日期	日期

客户零件编号

客户模具编号

模具编号